

Glass Chiller

Glass Chiller Self Contained



Features:

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- Forced air refrigeration system
- Auto defrost
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Spring loaded lifting mechanism or adjustable shelves accommodates 355mm x 355mm or 355mm x 431mm baskets
- Shelf model fitted with two plastic coated shelves per door
- Self closing doors with easy to clean handles
- On castors
- Hermetique compressor
- Face mounted hinges (plinth mount ready)
- Polycarbonate night lid
- Drain thru floor for clean out



MODEL	GC1U	GC2U
Capacity – Baskets (not included)	4	8
Finish: Stainless steel interior & exterior*		
Refrigerator Glass Door Spring Loaded +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	GC1USL 100/3.6/570	GC2USL 140/4.0/750
Finish: Stainless steel interior & exterior*		
Refrigerator Glass Door Adjustable shelf configuration +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	GC1U 100/3.6/570	GC2U 140/4.0/750

*Refer notes page 35

Gas: Self-contained fridge R134a@-5C SST
Electrical lead length 1.5m min. 240V 50Hz
Heat rejection self-contained units: Fridge 1.4xWr

Options (see page 35):

Stainless steel shelf

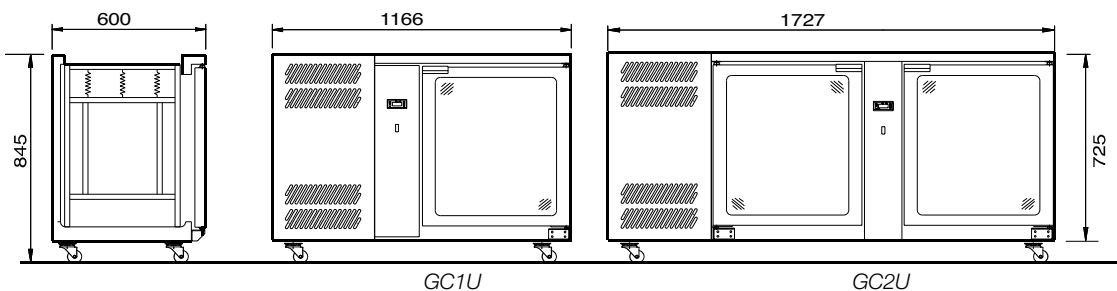

GC1U

GC2U