

Opal 1/1 Gastronorm Under Counter Self Contained

Opal

Features:

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- Coved internal liner
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Forced air refrigeration system contained in a FRONT BREATHING (FB model only) removable cassette for easy servicing and maintenance
- Auto defrost
- Waste heat recovery vaporiser
- Two adjustable plastic coated 1/1 Gn shelves and two pairs of dedicated anti tilt slides per door
- Easy to remove shelf support, drawers and complete runner system to make cleaning and maintenance simple
- Heavy duty swivel and brake castors
- Self closing doors with easy to clean handles
- Hermetique compressor
- Face-mounted hinges (plinth mount ready)
- Anti corrosive evaporator coil coating




MODEL	O1U	O2U	O3U	O4U
Capacity	190 litres	350 litres	510 litres	670 litres
Finish: Stainless Steel interior and exterior*				
H – Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HO1UFB 100/2.8/280	HO2UFB 130/3.8/400	HO3UFB 160/4.0/500	HO4UFB 190/4.8/650
BA – Blown Air Well Refrigerator +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.) Pans 100mm deep (included) Gn	HO1UBA 100/2.8/430 4 X 1/3	HO2UBA 130/3.8/600 7 X 1/3	HO3UBA 160/4.0/750 9 X 1/3	HO4UBA 190/4.8/850 12 X 1/3
L – Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LO1UFB 100/3.0/320	LO2UFB 130/4.5/450	LO3UFB 160/4.7/600	N/A

*Refer notes page 21

Gas: Self-contained fridge R134a@-5C SST
Self-contained freezer R404a@-30C SST
Electrical lead length 1.5m min. 240V 50Hz
Heat rejection self-contained units: Fridge 1.4xWr, Freezer 1.6xWr

Options (see page 21):

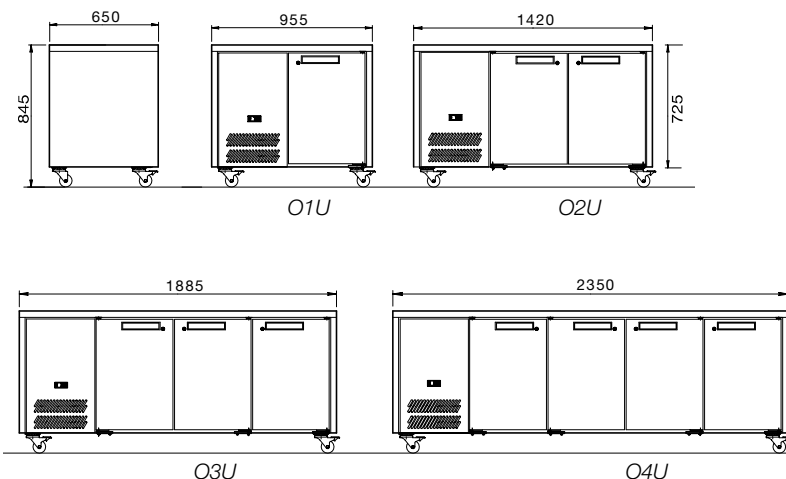

BA – Blown Air Well