

Opal Wide

Opal 1/1 Gastronorm Under Counter **Remote**




Features:

- Designed for 43°C ambient environment
- Adjustable electronic controller with digital temperature display
- Coved internal liner
- 100% CFC free polyurethane foam for greater insulation properties and added strength
- Fitted with evaporator, TX valve, controller, fitted plug and condensate drain
- Auto defrost
- Accommodates 1/1 gastronorm pans on shelves or dedicated anti tilt tray slides
- Two adjustable plastic coated 1/1 Gn shelves per door
- Easy to remove shelf support, drawers and complete runner system to make cleaning and maintenance simple
- Self closing doors with easy to clean handles
- Face-mounted hinges (plinth mount ready)
- Easy connection access (3 sides)
- Anti corrosive evaporator coil coating

MODEL	O1RW	O2RW	O3RW	O4RW
Capacity	190 litre	350 litre	510 litre	670 litre
Finish: Stainless Steel interior and exterior*				
H – Refrigerator Solid Door +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	HO1RW 90/0.4/280	HO2RW 120/0.5/400	HO3RW 150/0.6/500	HO4RW 180/0.7/650
BA – Blown Air Well Refrigerator +1°/+4° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.) Pans 100mm deep (included) Gn	HO1RWBA 90/0.4/430 2 X 1/3	HO2RWBA 120/0.5/600 4 X 1/3	HO3RWBA 150/0.6/750 7 X 1/3	HO4RWBA 180/0.7/850 10 X 1/3
L – Freezer Solid Door -18°/-22° kg-unpacked / Amps-run / Wr-refrigeration Watts (nom.)	LO1RW 90/2.2/320	LO2RW 120/2.4/450	LO3RW 150/2.6/600	N/A

*Refer notes page 21

Gas: Remote units R404a (others available)
Electrical lead length 1.5m min. 240V 50Hz

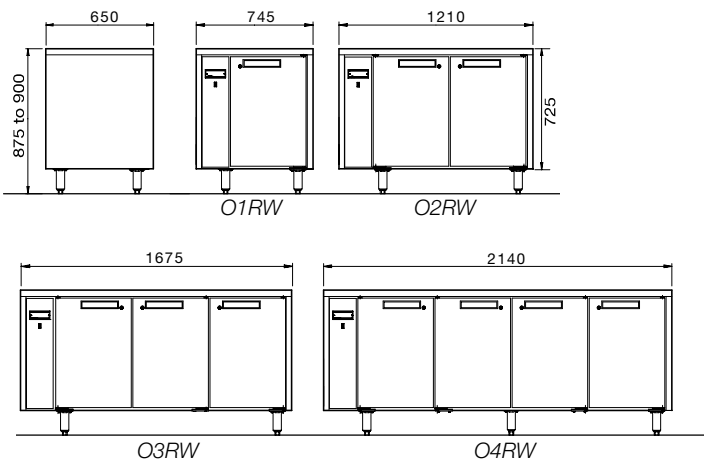

Options (see page 21):



BA – Blown Air Well